

High performance Walk Through Metal Detector

VVD4330

- **VVD4330** adapts beam structure, modular design and hidden wiring design. This design not only is more convenient for installation, maintenance and logistics, but also enables higher security level.
- Advanced robust and washable panels
- High durability, anti-wearing and weather proof structure
- A stainless steel metal bracket with adjustable viewing angles provides better viewing angle and avoids light reflection. In addition, the brightness of the back-light can be adjusted by the program to make the interface clearer
- It adapts 15v lower voltage power to protect the human body. The switch is equipped with an indicator light of power supply status
- A single cable connector is delivered with the device. Enables linkage between the turnstile and the walk through metal detector



33 Detection zones

7" LCD HD display interface

Remote control

Simple installation and use

Excellent anti-interference ability and stability

Each zone has 300 adjustable sensitivity level

High accuracy and verification speed

Compliant with NIJ 0601.02

Specification :

Input voltage : 100-240V, 50/60 Hz

Working temperature : -20°C---+50°C


External Dimensions (mm) : 2220 (H) x 930(W) x 760(D)

Channel Dimensions (mm) : 2010 (H) x 760(W) x 760 (D)

Gross weight :70 kg

Detection Area

- Support multiple detection zone modes, including the modes of a single detection zone, 6 zones, 11 zones and 33 detection zones
- 0-300 adjustable sensitivity levels of Zone, 0-255 adjustable sensitivity levels of Anti-shock
- From the shoe level to the crossbar, it accurately detects multiple metal objects simultaneously
- Both sides of the Led indicator can be clearly seated in the actual metal position, and depending on the size and shape of the metal, different alarm intensities are displayed on the control panel
- Accurate detection of weapons and contraband, while filtering watches, coins, belts, buttons and other harmless items
- Harmless to human body, heart pacemaker, pregnant women, magnetic floppy disk, recording tapes etc.

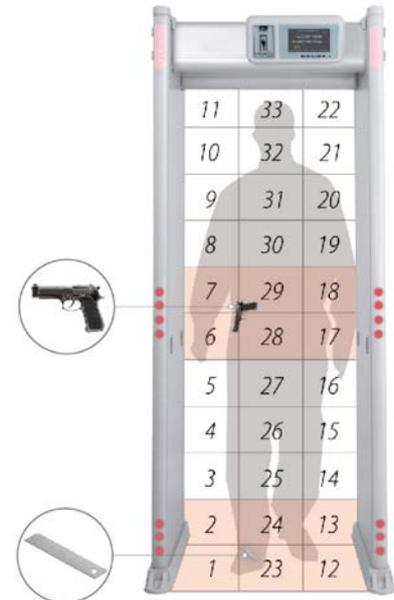

Main Interface

- Precision passenger counting and alarm counting
- Alarm intensity indicator
- Real-time display
- Detection zone setup
- Channel setting



- Alarm:** 0-9s Audio alarm duration setting, 0-95 Led alarm delay, 0-20 alarm volume, 16 Alarm tones
- Location :** 30 Application spots quickly setup
- Time :** Manual correction time
- Password :** Enter the old password to set the new password
- Zone :** Single zone, 6 zones, 11 zones, 33 zones to set up
- Diagnosis :** Fault fast detection, easier to find faults and facilitate maintenance
- Safety Grade :** High, Medium. Low – three security level fast setting
- System :** Set working channels, detect speed and power condition
- Display :** Set screen back-light brightness
- Records:** The number of hours of security checks for the equipment is recorded

VandaVeto®

5 Korazin st., Givatayim 53583 Israel
Tel: 972-3-5713004 Fax: 972-3-5711450

egber@egber.com

www.egber.com