


NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

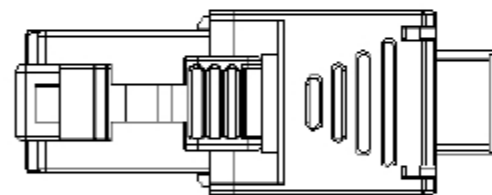





ENVIRONMENTAL:

1. STORAGE: -40° TO +85°
2. OPERATION: 0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL: ZINC ALLOY
2. IDC MATERIAL: PC
3. PCB MATERIAL: FR-4 T=1.6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN 0.30mm
5. IDC LIFE: 200 TIMES MIN
6. WIRE: AWG 23-26

					 VandalVeto®				אגבר אלקטרוניקה 2000 בע"מ 			
					Material				Item No.		601027	
					Angles Projection		Size	Scale	Unit	Part Name		FTP CAT6A Field Termination Plug, toolless
SYM	Number	Bill No. of Alteration	Signature	Date	 	A4	X:1	mm	ERP Part No.			
Drawn					Tolerance	Sheet	1 OF 1	Version: A/0				
Checked					0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30°							
Approved												